

**Benchmark****BMG745**

## CUT D HIGH STRENGTH NYLON / PU GLOVE

A dexterous high cut resistance glove, glass and steel fibre free. Ideal in dry or greasy conditions.

### FEATURES

- › Cut resistance: Level D (EN 388:2016)
- › A flexible and comfortable glove offering great dexterity
- › Glass and steel fibre free reduce risks of irritation
- › Durable polyurethane palm coating ensures good protection against abrasion
- › Flexible, close-fitting design for a comfortable wearing experience
- › Breathable back of hand to reduce perspiration
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit



### SUITABLE FOR


#### Typical Industries

- Aerospace
- Engineering
- Automotive
- Logistics
- Construction
- Manufacturing

#### Suitable Applications

- Assembly
- Handling sharp parts
- Maintenance
- Goods handling

### CERTIFICATION

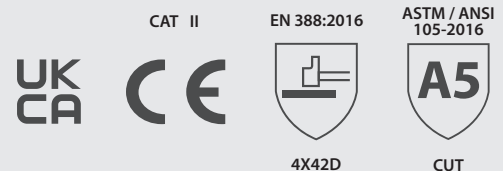

See overleaf for explanation

**Benchmark****BMG745****PRODUCT INFORMATION**


<b>MATERIALS</b>	LINER:	13 gauge high strength nylon
	COATING:	Polyurethane
<b>COLOUR</b>	Grey/Black	
<b>LENGTH (mm)</b>	250 (Size Dependent)	
<b>CUFF STYLE</b>	Elasticated knit wrist	

**RECOMMENDATIONS FOR USE**

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

**ORDERING DETAILS**

SIZE	CODE	PACKAGING
6/XS	BMG00745FB	10 pairs per bag
7/S	BMG00745FD	120 pairs per case
8/M	BMG00745FF	
9/L	BMG00745FH	
10/XL	BMG00745FJ	
11/XXL	BMG00745FL	

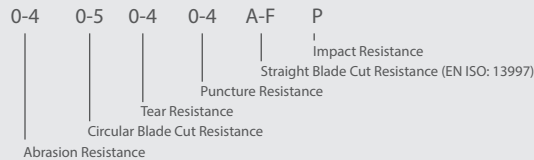**CERTIFICATION LEGENDS**MECHANICAL HAZARDS EN 388:2016  
PERFORMANCE LEVELS\*

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**CLASSIFICATION FOR CUT RESISTANCE**

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

**EUROPE**[www.globusgroup.com](http://www.globusgroup.com)E: [sales@globus.co.uk](mailto:sales@globus.co.uk)

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

**MIDDLE EAST AND AFRICA**[www.globusgroup.com/gcc](http://www.globusgroup.com/gcc)E: [gcc@globusgroup.com](mailto:gcc@globusgroup.com)

T: +971 4 882 9962

F: +971 4 882 9963

**GLOBUS AMERICAS**[www.globusgroup.com](http://www.globusgroup.com)E: [americas@globusgroup.com](mailto:americas@globusgroup.com)

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM  
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES  
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2022 Globus (Shetland) Ltd | BMK-DATA-BMG745\_0722\_1

EU compliance certificate delivered by the notified body INTERTEK ITALIA SPA, Via Guido Miglioli, 2/A - 20063 Cernusco sul Naviglio (MI) - Italia (Notified Body No. 2575)  
 UKCA compliance certificate delivered by the notified body ITS Testing Services UK Ltd, Centre Court, Meridian Business Park, Leicester, LE19 1WD, United Kingdom (Approved Body No. 0362)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.