



SKYTEC™ ECG

CHROME™

FULLY COATED NITRILE GLOVE WITH RECYCLED POLYESTER LINER

Fully coated nitrile with a nitrile foam palm and 100% rPET liner. Excellent grip in wet and oily conditions as well as oil and water submersion.

FEATURES

- A flexible, robust glove with 100% recycled polyester (rPET) liner
- Protects the hand from water, oils, hydrocarbons, grease and abrasion, with optimal long lasting grip
- Touchscreen capabilities to allow usage with screen devices
- Contact heat protection up to 100°C for a short period (15 sec max)
- RCS (Recycled Claim Standard) certified
- Designed for easy movement and continuous wear
- Close-fitting liner for a comfortable wearing experience
- Elasticated wrist provides a secure fit
- 1 pair = 2 500ml (PET) plastic bottles, recycled



OIL GRIP



OIL SUBMERSION



TOUCH SCREEN



DUAL COATING TECHNOLOGY

SUITABLE FOR

Typical Industries

- Aerospace
- Automotive
- Construction
- Engineering
- Manufacturing
- Oil and Gas

Suitable Applications

- Concreting
- Handling Oily Components
- Maintenance
- Oil Submersion
- Painting
- Wet Work

CERTIFICATION

UK
CA

CAT II
CE

EN 388:2016
+ A1:2018



4121X

EN 407:2020



X1XXXX

ANSI



ABRASION

ANSI



PUNCTURE

GLOBUS



PRODUCT INFORMATION

MATERIALS	LINER:	15 gauge 100% recycled polyester (rPET)
	COATING:	Foam nitrile over nitrile
COLOUR	Blue/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00047BB	10 pairs per paper wrap
7/S	SKG00047BD	
8/M	SKG00047BF	
9/L	SKG00047BH	120 pairs per case
10/XL	SKG00047BJ	
11/XXL	SKG00047BL	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal up to 100C, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE :** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

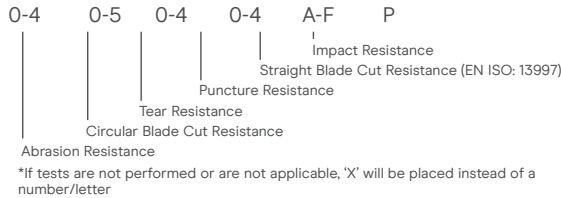

HEAT AND FIRE EN 407

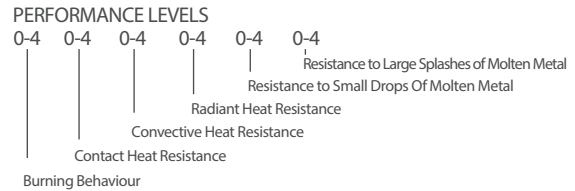

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-ECO-CHROME-0623_1_C

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)
UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LW, United Kingdom. [UK Approved Body No. 1105]

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.